



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : B41J 2/06</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/27058</p> <p>(43) International Publication Date: 31 July 1997 (31.07.97)</p>
<p>(21) International Application Number: PCT/GB97/00189</p> <p>(22) International Filing Date: 22 January 1997 (22.01.97)</p> <p>(30) Priority Data: 9601223.2 22 January 1996 (22.01.96) GB</p> <p>(71) Applicant (for all designated States except US): TONEJET CORPORATION PTY. LTD. [AU/AU]; 210 Greenhill Road, Eastwood, S.A. 5063 (AU).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): NEWCOMBE, Guy, Charles, Fernley [GB/GB]; 94 Ainsworth Street, Cambridge CB1 2PD (GB). SCHUMANN, Matthew, Alexander [GB/GB]; 20 Seymour Street, Cambridge CB1 3DQ (GB). JANSE VAN RENSBURG, Richard, Wilhelm [GB/GB]; 16 Colesfield, Longstanton, Cambridge CB4 5BW (GB). EMERTON, Neil [GB/GB]; 3 Stourbridge House, Riverside, Cambridge CB5 8EY (GB). BLAKEY, David, Mark [GB/GB]; 25 Oxford Road, Top Flat, Cambridge CB4 3PH (GB).</p> <p>(74) Agent: GILL JENNINGS & EVERY; Broadgate House, 7 Eldon Street, London EC2M 7LH (GB).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: ELECTRODE FOR PRINTER</p> <p>(57) Abstract</p> <p>An ejection apparatus for ejecting material from a liquid has an ejection cell (2) for containing the liquid in use. The cell (2) has a protrusion (3) disposed so as to be contacted by liquid in the cell on more than one side and defining a predetermined location for a meniscus of the liquid at an opening in the cell. An ejection electrode (6) is disposed in the cell at a position inwardly of the cell with respect to the predetermined location of the meniscus.</p> <div data-bbox="638 1157 1360 1774"> <p>The diagram illustrates a cross-section of an ejection cell (2). It features a central protrusion (3) that extends from the bottom of the cell. An ejection electrode (6) is positioned within the cell, above the protrusion. The electrode (6) has a series of vertical segments, with one segment labeled 6'. The protrusion (3) is shown with a meniscus of liquid at its top. The cell (2) is bounded by a wavy line representing the liquid surface. Other labels include 4, 7, and 7' pointing to various parts of the cell and the protrusion.</p> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

ELECTRODE FOR PRINTER

The present invention relates to an electrode for a printer employing technology the same as or similar to that described in WO-A-93-11866, PCT/GB95/01215 and WO-A-94-18011.

In order to achieve effective ejection from apparatus of this type, it is desirable that the carrier or support liquid containing the material to be ejected extends as far forwardly as possible towards the tip of the ejection location.

According to the present invention an ejection apparatus for ejecting material from a liquid, comprises an ejection cell for containing the liquid in use, the cell having a protrusion disposed in the cell and defining a predetermined location for a meniscus of the liquid at an opening in the cell; and

an ejection electrode disposed in the cell at a position inwardly of the cell with respect to the predetermined location.

The protrusion may be disposed so as to be contacted by liquid in the cell on more than one side.

The means for defining a predetermined location for a meniscus of the liquid preferably comprises a substantially triangularly shaped insulating separator.

By arranging the separators in this form, it has been found that the meniscus of the carrier liquid extends further forward than in the case of a cell of cylindrical design.

Preferably, a portion of the electrode also has a triangular shape tapering to an apex away from the opening, but does not extend as far forward as the tip of the separator and so lies at a position behind the predetermined location of the liquid's meniscus.

In an alternative construction, the cells between the separators are further defined by inner walls so that each cell has a pair of limbs each extending along one of the

outer surfaces of the separators. Liquid may then flow in a path along one of the cell limbs to the ejection location and then away from the ejection location along the other limb.

5 In another alternative construction, the means for defining the predetermined location of the meniscus comprises a substantially triangular insulating separator and a substantially rectangular insulating separator.

10 Preferably, in this construction, the cells between the separators are also further defined by inner walls so that each cell forms a channel in which liquid may flow. A triangular separator at an ejection location has an apex, the shape of which defines the predetermined location of the meniscus.

15 One example of a printer incorporating electrodes according to the present invention, will now be described with reference to the accompanying drawings in which:

Figure 1 is an isometric front view of a portion of a printhead;

20 Figure 2 is a side view of part of the printhead of Figure 1;

Figure 3 is an isometric front view of an alternative embodiment of a portion of a printhead;

25 Figure 4 is a partial perspective view of a portion of a further printhead incorporating ejection apparatus according to the present invention;

Figure 5 is a view similar to Figure 4 showing further and alternative features of the ejection apparatus; and

30 Figure 6 is a partial sectional views through a cell of Figure 4.

The printhead 1 is designed to operate in the manner described in the above International applications and is shown, in the present example, as comprising four parallel cells 2 which are separated from one another by triangularly shaped separator walls 3 and in each of which flows, in use, a carrier liquid 4 for particulate pigmented material which is used to form an image on an underlying

substrate. The mechanism of operation is as described in the PCT applications and will not be further described herein in detail.

5 The rearwards part of each of the cells 2 is closed by side walls 5 which thus, in this example, define a chamber or chambers (not shown) behind the cells 2. The ends of the printhead are formed by tapering walls 8. Each of the cells 2 has a tip or front portion with an opening in which extends the forward part 6' of an ejection electrode 6,
10 each of which electrodes is of triangular shape as shown best in Figure 1. Figure 2 illustrates the positioning of the meniscus 7 of the carrier fluid and shows the position of the electrode tip portion 6' in each of the cells, behind the meniscus 7.

15 The triangular shape of the separator walls 3 at their front edge allows each meniscus 7 to extend further forwards than if the separators were flat or straight edged at the front and this improves ejection of the material from the carrier liquid.

20 Figure 3 shows an alternative embodiment in which the cell 2 formed between the rectangular separators 10 is trough-like. The triangular separator 9 formed in the cell at the ejection location causes the meniscus of the carrier fluid to protrude from the plane of the cell to a
25 predetermined location. The electrode 11 formed on the walls of the cell 2 lies behind this predetermined location.

It should be noted that although figure 3 illustrates a single cell it is intended that plural cells in close
30 proximity may be used.

Other examples are illustrated in Figures 4 to 6. Figure 4 illustrates part of an array-type printhead 1, the printhead comprising a body 2 of a dielectric material such as a synthetic plastics material or a ceramic. A series of
35 grooves 3 are machined in the body 2, leaving interposing plate-like lands 4. The grooves 3 are each provided with a ink inlet and ink outlet (not shown, but indicated by

arrows I & O) disposed at opposite ends of the grooves 3 so that fluid ink carrying a material which is to be ejected (as described in our earlier applications) can be passed into the grooves and depleted fluid passed out.

5 Each pair of adjacent grooves 3 define a cell 5, the plate-like land or separator 4 between the pairs of grooves 3 defining an ejection location for the material and having an ejection upstand 6,6'. In the drawing two cells 5 are shown, the left-hand cell 5 having an ejection upstand 6
10 which is of generally triangular shape and the right-hand cell 5 having a truncated ejection upstand. Each of the cells 5 is separated by a cell separator 7 formed by one of the plate-like lands 4 and the corner of each separator 7 is shaped or chamfered as shown so as to provide a surface
15 8 to allow the ejection upstand to project outwardly of the cell beyond the exterior of the cell as defined by the chamfered surfaces 8. A truncated ejection upstand 6' is used in the end cell 5 to reduce end effects resulting from the electric fields which in turn result from voltages
20 applied to ejection electrodes 9 provided as metallised surfaces on the faces of the plate-like lands 4 facing the ejection upstand 6,6' (ie. the inner faces of each cell separator). As can be seen from Figure 6, the ejection electrodes 9 extend over the side faces of the lands 4 and
25 the bottom surfaces 10 of the grooves 3. The precise extent of the ejection electrodes 9 will depend upon the particular design and purpose of the printer.

Figure 5 illustrates two alternative forms for side covers of the printer, the first being a simple straight-
30 edged cover 11 which closes the sides of the grooves 3 along the straight line as indicated in the top part of the figure. A second type of cover 12 is shown on the lower part of the figure, the cover still closing the grooves 3 but having a series of edge slots 13 which are aligned with
35 the grooves. This type of cover construction may be used to enhance definition of the position of the fluid meniscus which is formed in use and the covers, of whatever form,

can be used to provide surfaces onto which the ejection electrode and/or secondary or additional electrodes can be formed to enhance the ejection process.

5 Figure 5 also illustrates an alternative form of the ejection electrode 9, which comprises an additional metallised surface on the face of the land 4 which supports the ejection upstand 6,6'. This may help with charge injection and may improve the forward component of the electric field.

10 Figure 6 illustrates a partial sectional view through one side of the one of the cells 5 of Figure 4, with a secondary electrode 19 being shown located on the chamfered face 8 on the cell separator lands 4 and therefore disposed substantially alongside the ejection upstand. In a further
15 embodiment (not shown) the secondary electrode may be formed, at least in part, on the face of the cell separator land 4 (and thus rearwardly of the ejection upstand), with the ejection electrode also on the face, but separated therefrom.

20

CLAIMS

1. An ejection apparatus for ejecting material from a liquid, comprises:
 - 5 an ejection cell for containing the liquid in use, the cell having a protrusion disposed in the cell and defining a predetermined location for a meniscus of the liquid at an opening in the cell; and
 - an ejection electrode disposed in the cell at a
10 position inwardly of the cell with respect to the predetermined location.
2. Apparatus according to claim 1, wherein the protrusion
15 is disposed so as to be contacted by liquid on more than one side.
3. Apparatus according to claim 1 or claim 2, wherein the protrusion for defining the predetermined location for the
20 meniscus of the liquid is substantially triangularly shaped.
4. Apparatus according to claim 1, wherein the cells are defined between separator walls.
- 25 5. Apparatus according to claim 4, wherein each cell has a pair of limbs each extending adjacent to the outer surfaces of the separators, wherein liquid may flow in a path along one of the cell limbs to the ejection location and then away from the ejection location along the other
30 limb.
6. Apparatus according to any of claims 1 to 3, wherein the predetermined location of the meniscus is also partly defined by a substantially rectangular insulating
35 separator.

7. Apparatus according to any of the preceding claims wherein a portion of the ejection electrode also has a triangular shape tapering to an apex away from the opening, but does not extend as far forward as the tip of the triangular separator and so lies at a position behind the predetermined location of the liquid's meniscus.
- 5
8. The ejection apparatus according to any of the preceding claims, comprising a plurality of said ejection
- 10 cells.

1/5

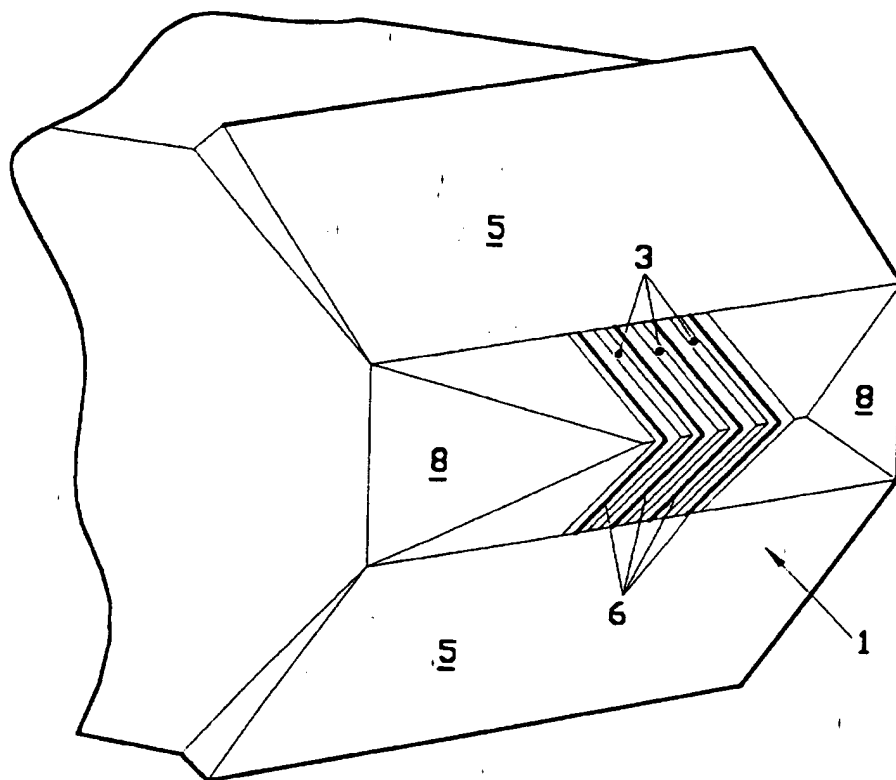


FIG. 1

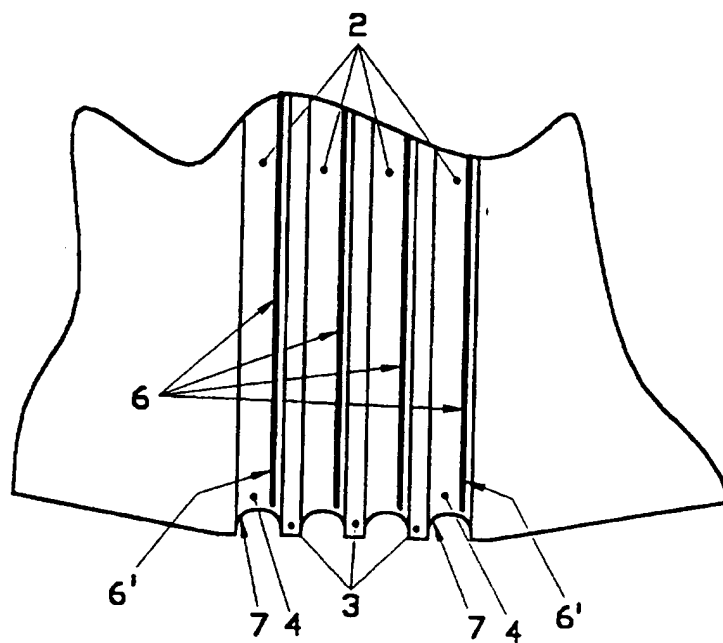


FIG. 2

2/5

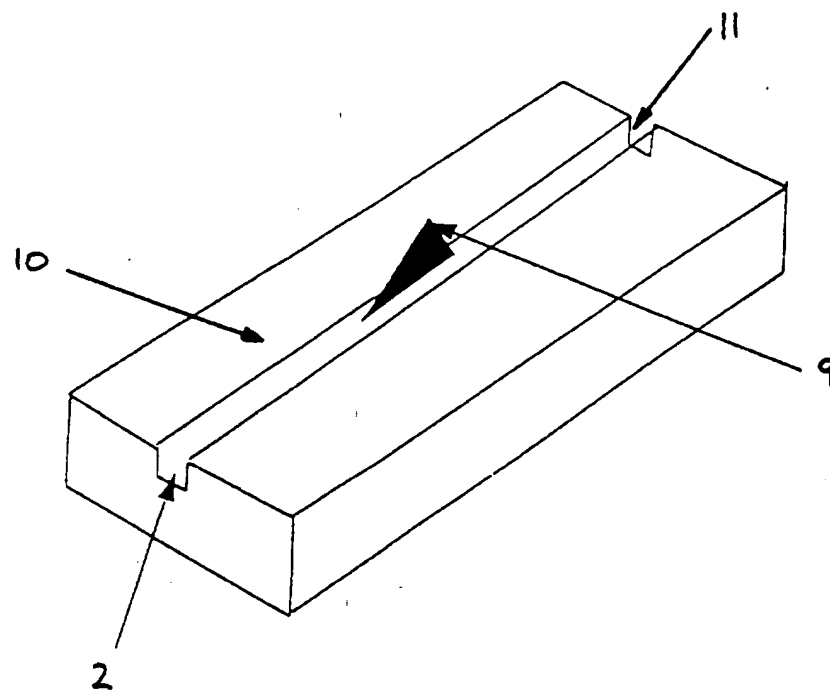


Figure 3

3/5

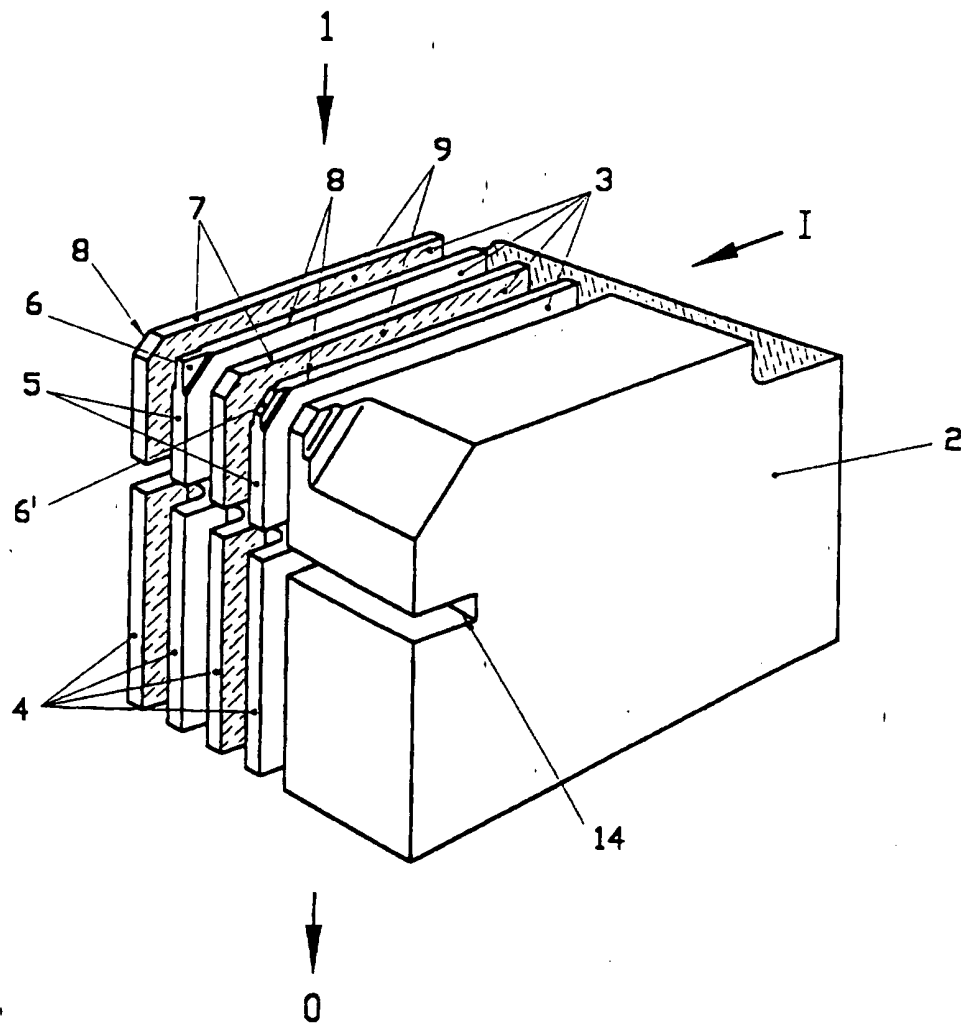


FIG. 4

4/5

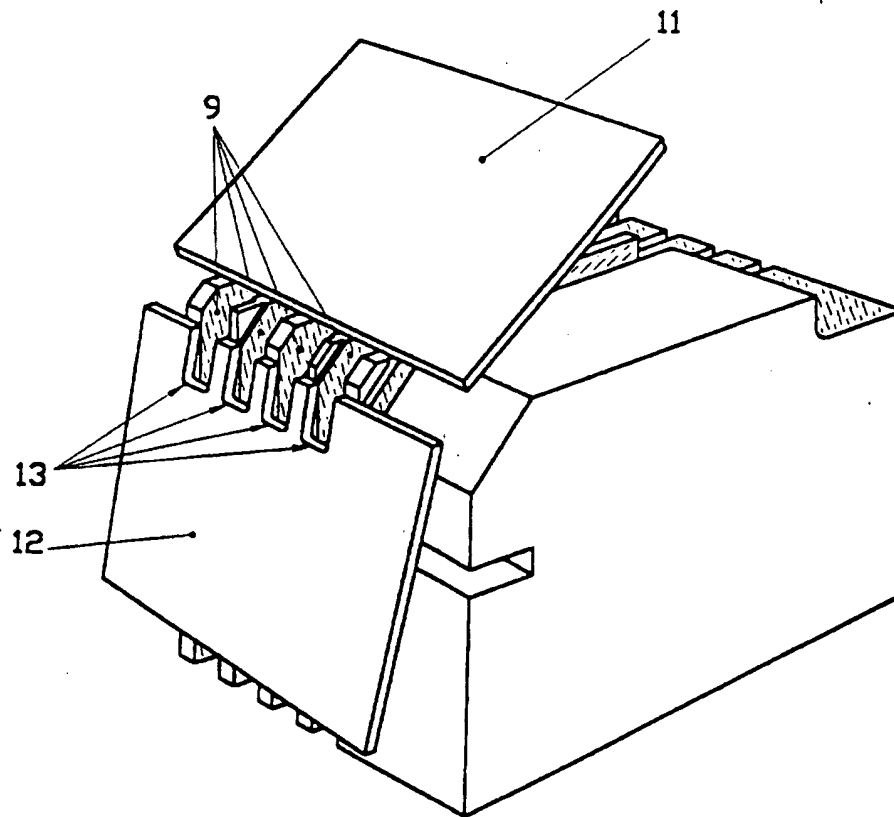


FIG. 5

5/5

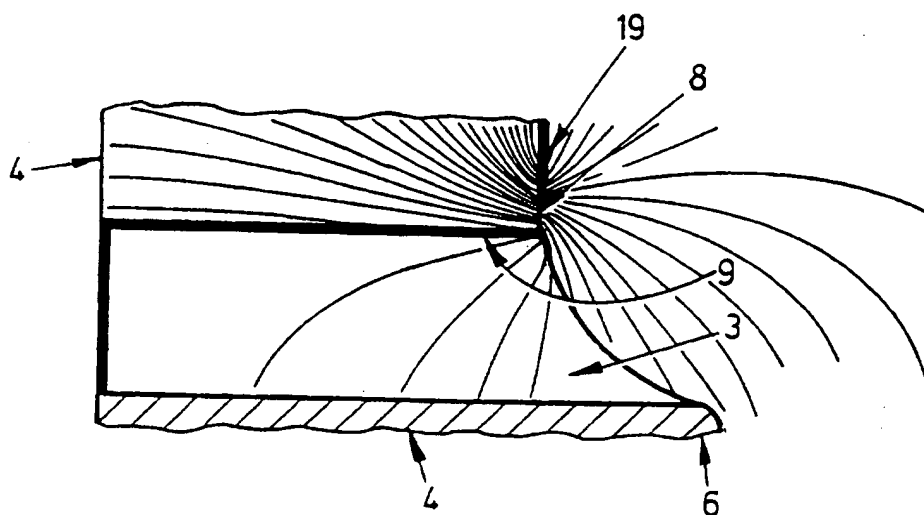


FIG. 6

INTERNATIONAL SEARCH REPORT

national Application No

PCT/GB 97/00189

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B41J2/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B41J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	EP 0 703 081 A (KABUSHIKI KAISHA TOSHIBA) 27 March 1996 see column 10, line 17 - column 16, line 4; figures 4,5	1,2
Y	WO 93 11866 A (RESEARCH LABORATORIES OF AUSTRALIA PTY. LTD.) 24 June 1993 cited in the application see the whole document	1,2
Y	US 5 144 340 A (HOTOMI ET AL.) 1 September 1992 see column 13, line 63 - column 14, line 29; figures 11,12	1,2



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

29 April 1997

Date of mailing of the international search report

23.05.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Meulemans, J-P

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 97/00189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 703081 A	27-03-96	JP 8156260 A	18-06-96
		JP 8149253 A	07-06-96
		JP 8142331 A	04-06-96

WO 9311866 A	24-06-93	AU 3152693 A	19-07-93
		CA 2126235 A	24-06-93
		EP 0646044 A	05-04-95
		JP 7502218 T	09-03-95

US 5144340 A	01-09-92	JP 2235755 A	18-09-90
		JP 2295750 A	06-12-90
